



# MultiLane Loopback Offerings for 1.6T

Brochure | 2026

# MultiLane Loopbacks Offer Comprehensive Host Port Characterization at 1.6T

Loopbacks are a core competency at MultiLane and a key component of the company's value proposition. As network innovations diversify in the face of a rapidly evolving ecosystem, ensuring host ports can accommodate a variety of interconnects is more important than ever before. The MultiLane Loopback family allows companies to address this challenge in full confidence, with a suite of solutions tailored to this ecosystem.


All MultiLane loopbacks for 224 Gbps/lane and 1.6T come in either integrated or riding heatsink options.

## Electric (Passive) Loopbacks

Electric Loopbacks (ELB) offer rapid, pass/fail validation of host ports and can emulate passive pluggables like DACs.

### Passive Loopbacks

- Up to 45W dissipation
- Available in Type2 IHS and RHS shells
- OSFP1600 compliant shell with angled latch
- Various options for various use cases: front LED/LCD
- 4 temperature sensors
- CMIS 5.x compliant with CDB
- I2C and I3C support
- Real insertion counter
- Current sense
- Voltage sense

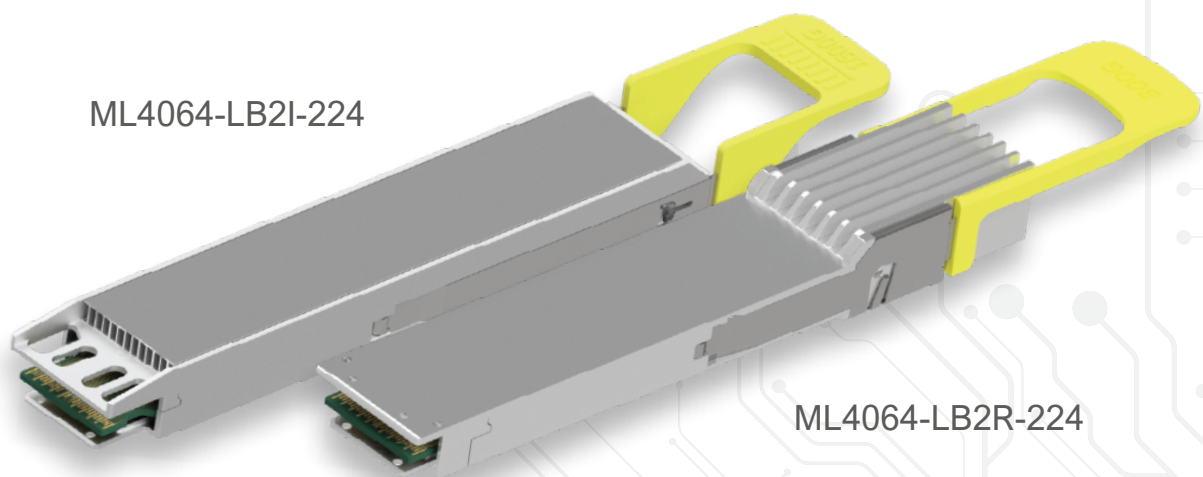

Passive Loopbacks

## Active Loopbacks


Active Loopbacks (ALB) are DSP-based modules that provide comprehensive host port characterization for lossy ports where passive pluggables cannot recover a signal. ALBs can emulate active pluggables like transceivers and can be equipped with the ThunderBERT GUI to provide instrument-grade measurements directly in port. MultiLane ALBs for 224 Gbps/lane are available with 5 nm (ALB6) or 3 nm (ALB7) DSPs.

### 5nm Active Loopbacks - ALB6

- Available in Type2 IHS and RHS shells
- OSFP1600 compliant shell with angled latch
- Available with two DSP options ALB6 and ALB7
- CMIS 5.x support with CDB, VDM, DPSM
- temperature sensors
- Real insertion counter
- Current sense
- Voltage Sense

### 3nm Active Loopbacks - ALB7

- Available in Type2 IHS and RHS shells
- OSFP1600 compliant shell with angled latch
- CMIS 5.x support with CDB, VDM, DPSM
- In-band Link Training
- FEC Monitoring
- Temperature sensors
- Real insertion counter
- Current sense
- Voltage sense

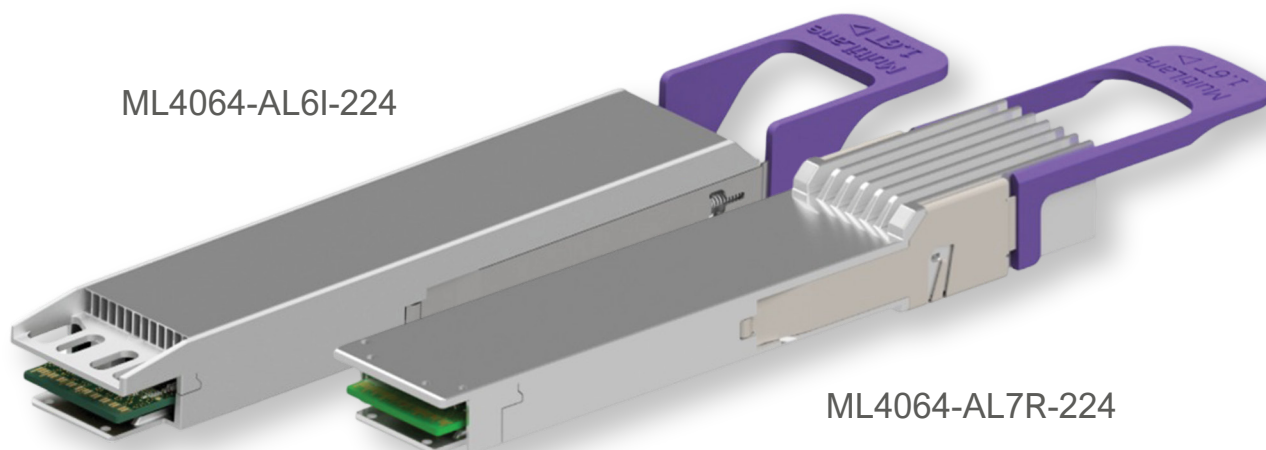


## DSP-Based Active Loopbacks

## Redriver-Based Loopbacks

Redriver-Based Loopbacks (RLB) feature a redriver to amplify a lossy signal and emulate the redriver-based pluggables like Active Copper Cables (ACC) and Linear Pluggable Optics (LPO) that have been gaining ground in the 1.6T generation.

## Redriver-Based Loopbacks

- 1.6T Redriver-based loopbacks to emulate Active Copper Cable applications
- Up to 40 W power dissipation
- OSFP1600 compliant shell
- Front LED
- Temperature, current, and voltage sensors
- CMIS 5.x compliant with CDB
- I2C and I3C support
- Real insertion counter

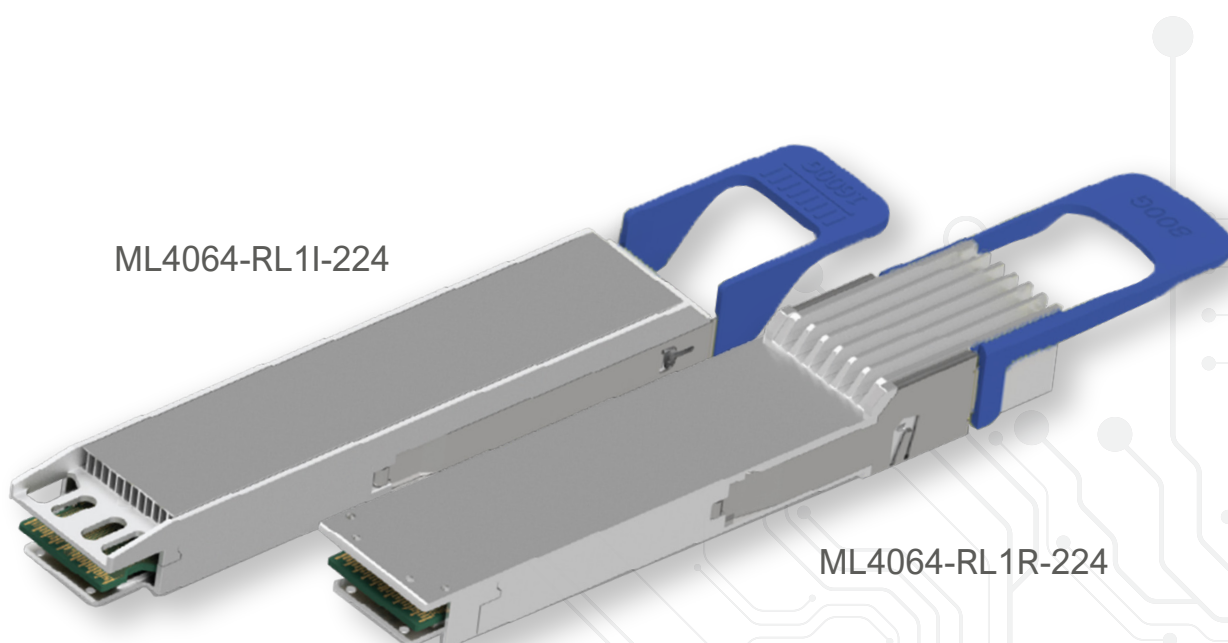

## Redriver-Based Loopbacks

| Revision No. | Last Modified |
|--------------|---------------|
| 0.5          | April 2026    |

**For technical info**  
[fae@multilaneinc.com](mailto:fae@multilaneinc.com)

**For sales support**  
[sales@multilaneinc.com](mailto:sales@multilaneinc.com)

Follow Us



[multilaneinc.com](http://multilaneinc.com)