

# RF Coaxial Terminator, 1.85 mm (F), 2 Watt

P/N: MLT-185FST-2

## Package Contents

Connector	1 Pc
Protection Cap	1 Pc

## Materials

Description	Material	Finish
Body Material	Stainless Steel	Passivated
Center Conductor	Brass	Gold-Plated

## Electrical Specifications

Impedance	50 Ohms
Frequency Range	DC to 67 GHz
V.S.W.R.	1.30 max. at 67 GHz
RF Power Handling	≤2 Watt Average at 25°C
Peak Power	-

## Mechanical Specifications

Mating Cycles	500 Cycles
---------------	------------

## Environmental Specifications

Operating Temperature Range	-55 to +125 °C
-----------------------------	----------------



### Features:

- Designed for Repeatability and Accuracy
- Wide Variety of Mating Interfaces
- Customizable


### Applications:

- Loads Dissipating Signal Reflections from Open Ports



# CAD Drawing

MLT-185FST-2

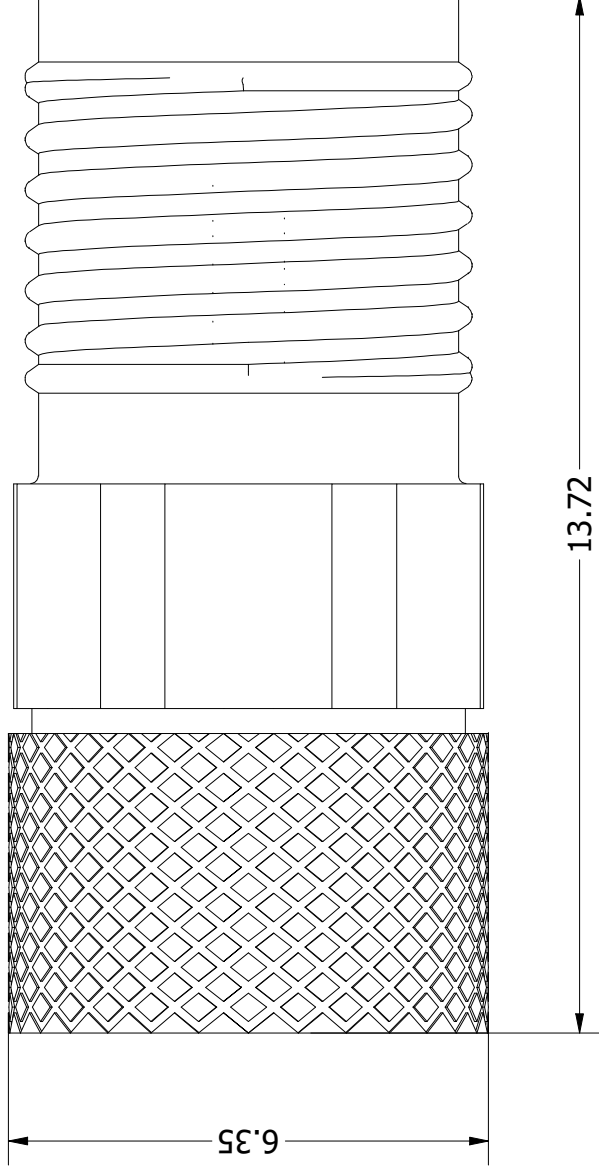

**Title:**

RF Coaxial Terminator, 1.85 mm (F),  
50 Ohm , 2 Watt

**Notes:**

- 1. All dimensions are in millimetres unless otherwise specified.
- 2. These characteristics are typical and for reference.



[www.multilaneinc.com](http://www.multilaneinc.com)  
[sales@multilaneinc.com](mailto:sales@multilaneinc.com)

**Rev:** A

**Scale:** 10:1