

RF Coaxial Terminator, 1.85 mm (M), 2 Watt

P/N: MLT-185MST-2

Package Contents

Connector	1 Pc
Protection Cap	1 Pc

Materials

Description	Material	Finish
Body Material	Stainless Steel	Passivated
Center Conductor	Brass	Gold-Plated

Electrical Specifications

Impedance	50 Ohms
Frequency Range	DC to 67 GHz
V.S.W.R.	1.50 max. at 67 GHz
RF Power Handling	≤2 Watt Average at 25°C
Peak Power	-

Mechanical Specifications

Mating Cycles	500 Cycles
---------------	------------

Environmental Specifications

Operating Temperature Range	-55 to +125 °C
-----------------------------	----------------



Features:

- Designed for Repeatability and Accuracy
- Wide Variety of Mating Interfaces
- Customizable


Applications:

- Loads Dissipating Signal Reflections from Open Ports



CAD Drawing

MLT-185MST-2

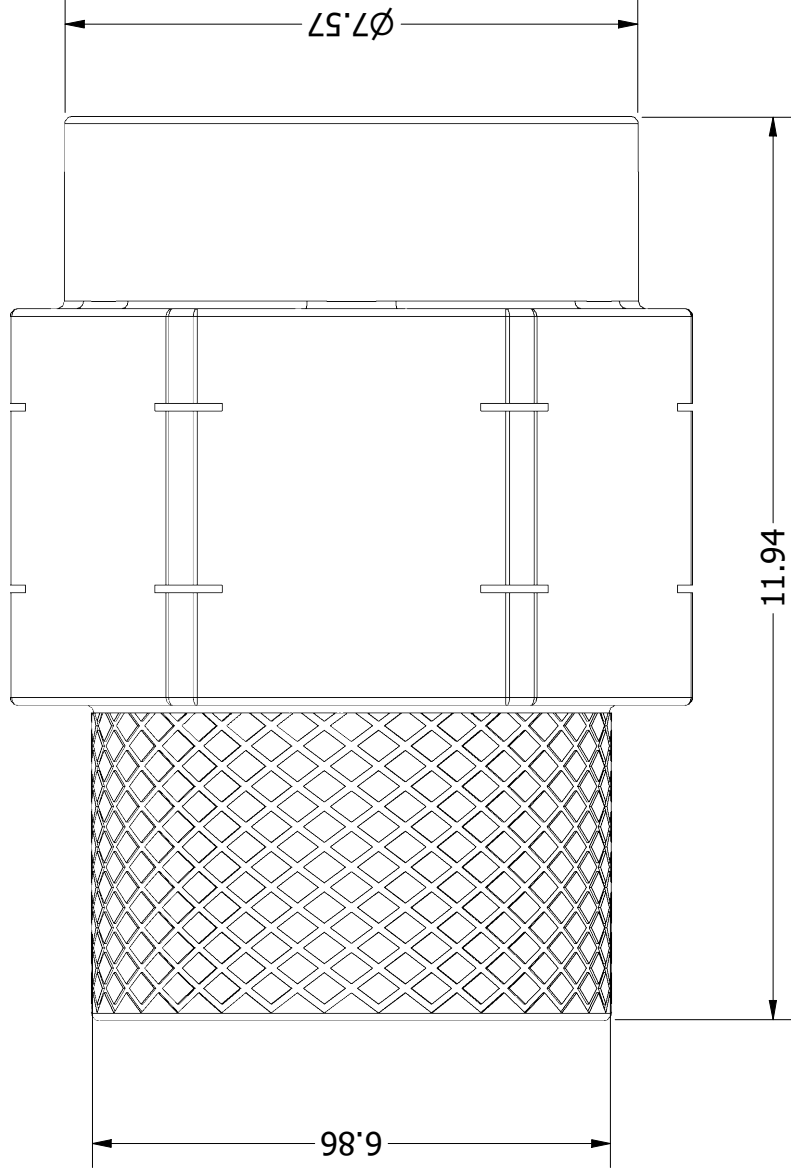

Title:

RF Coaxial Terminator, 1.85 mm (M) ,
50 Ohm , 2 Watt

Notes:

1. All dimensions are in millimetres unless otherwise specified.
2. These characteristics are typical and for reference.

multiLane 

www.multilaneinc.com
sales@multilaneinc.com

Rev: A

Scale: 10:1