Electrical

Frequency	0-67 GHz
VSWR	1.50 Max
Impedance	50 Ohms
Power Handling	2 Watt Average @ 25°C
	Derated Linearly to 0.5 Watts @ 125°C


Mechanical


1.85 Interface per	IEEE P287				
Operating Temperature	-55°C to +125°C				


Materials

Description	Material	Finish	Part Number		
Body	Stainless Steel	Passivated	435-7089-001		
Contacts	Brass	Au 50µ" Min Plated	435-7089-002		



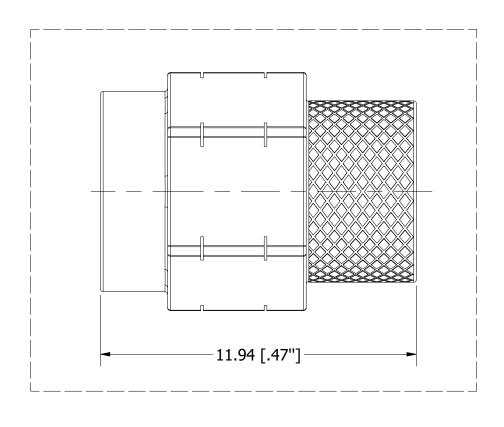

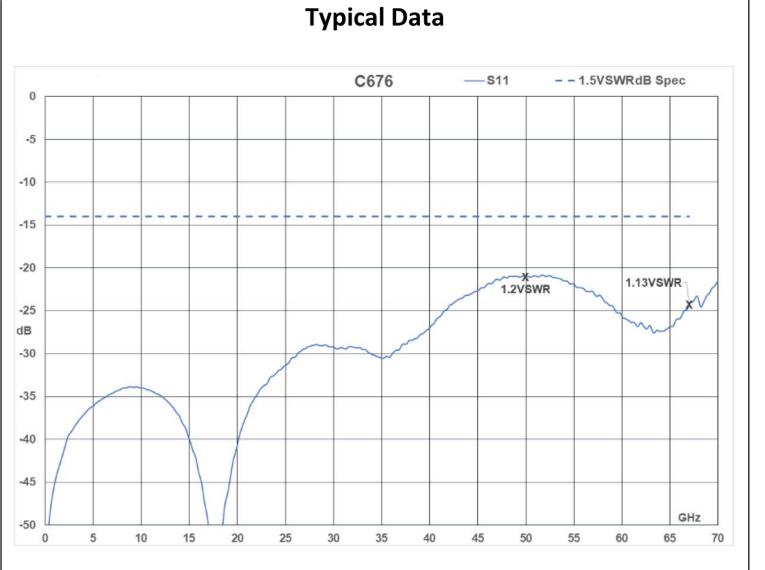



В

Customer P/N: MLT-185MST-2

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES		multiLane				
PROPRIETARY AND CONFIDENTIAL	TOLERANCES: x.x ± 0.1 x.xx ± 0.05 Rad ± 0.1 Dia ± 0.1 Ang ± 0.1° MATERIAL: N/A	RF Coaxial Terminator, 1.85mm (M), 50 Ohm, 2 Watt, 67 GHz					
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTILANE. ANY REPRODUCTION IN PART OF AS WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTILANE IS PROHIBITED	FINISH: N/A INTERPRET GEOMETRIC TOLERANCING	SIZE B SCALE	QTY	4	PART NO 142-7089-000	SHEET 1 OF 1	A01
4	2					1	