## **Electrical**

Frequency	0-50 GHz
VSWR	1.30 Max
Impedance	50 Ohms
Power Handling (Avg)	1 Watt Average @ 25°C


## Mechanical


2.40 Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C

## **Materials**

Description	Material	Finish
Body	Stainless Steel	Passivated
Contacts	BeCu	Au 50μ" Min Plated



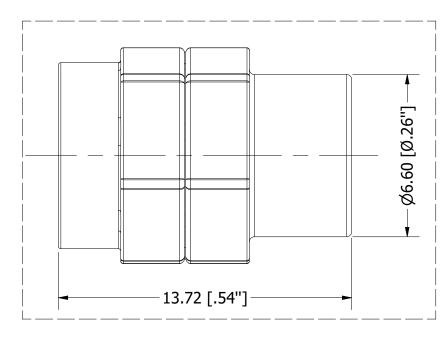

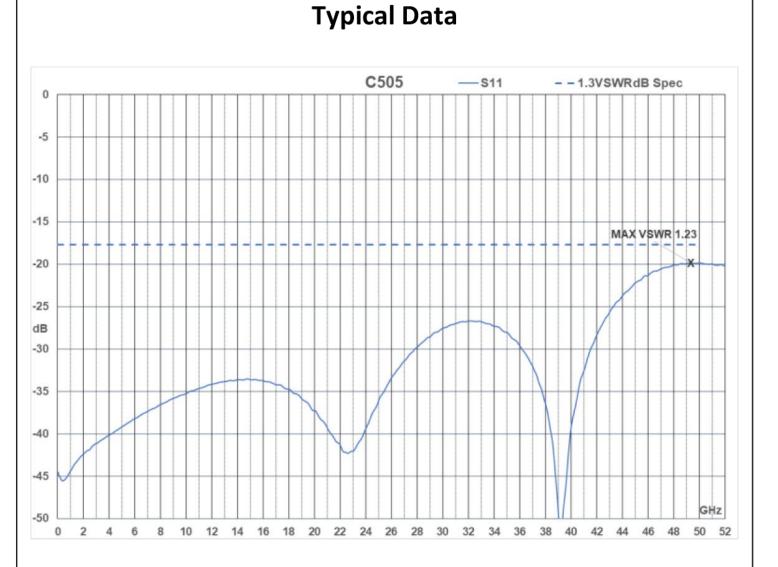



В

Customer P/N: MLT-240MST-1

	UNLESS OTHERWISE SPECIFIED	
	DIMENSIONS ARE IN MILLIMETRES	
	TOLERANCES:	TI
	$x.x \pm 0.1$	• •
	$x.xx \pm 0.05$	R
	Rad $\pm$ 0.1	Г
	Dia ± 0.1	5
	Ang ± 0.1°	
PROPRIETARY AND CONFIDENTIAL	MATERIAL: N/A	
		(

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTILANE. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT THE WRITTEN

FINISH: N/A AS WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTILANE IS PROHIBITED PER: ASME Y14.5-2009

multiLane TITLE

RF Coaxial Terminator, 2.40mm (M), 50 Ohm, 1 Watt, 50 GHz

SIZE	QTY	PART NO		REV
В		142-7089-002		A01
SCALE	6.5		SHEET 1 OF 1	