

# RF Coaxial Terminator, 2.92 mm (M), 2 Watt

P/N: MLT-292MST-2

## Package Contents

Connector	1 Pc
Protection Cap	1 Pc

## Materials

Description	Material	Finish
Body Material	Stainless Steel	Passivated
Center Conductor	Brass	Gold-Plated

## Electrical Specifications

Impedance	50 Ohms
Frequency Range	DC to 40 GHz
V.S.W.R.	1.20 max. at 40 GHz
RF Power Handling	≤2 Watt Average at 25°C
Peak Power	125 Watts (5μsec pulse width; 1% duty cycle)

## Mechanical Specifications

Mating Cycles	500 Cycles
---------------	------------

## Environmental Specifications

Operating Temperature Range	-55 to +125 °C
-----------------------------	----------------



## Features:

- Designed for Repeatability and Accuracy
- Wide Variety of Mating Interfaces
- Customizable


## Applications:

- Loads Dissipating Signal Reflections from Open Ports



# CAD Drawing

MLT-292MST-2

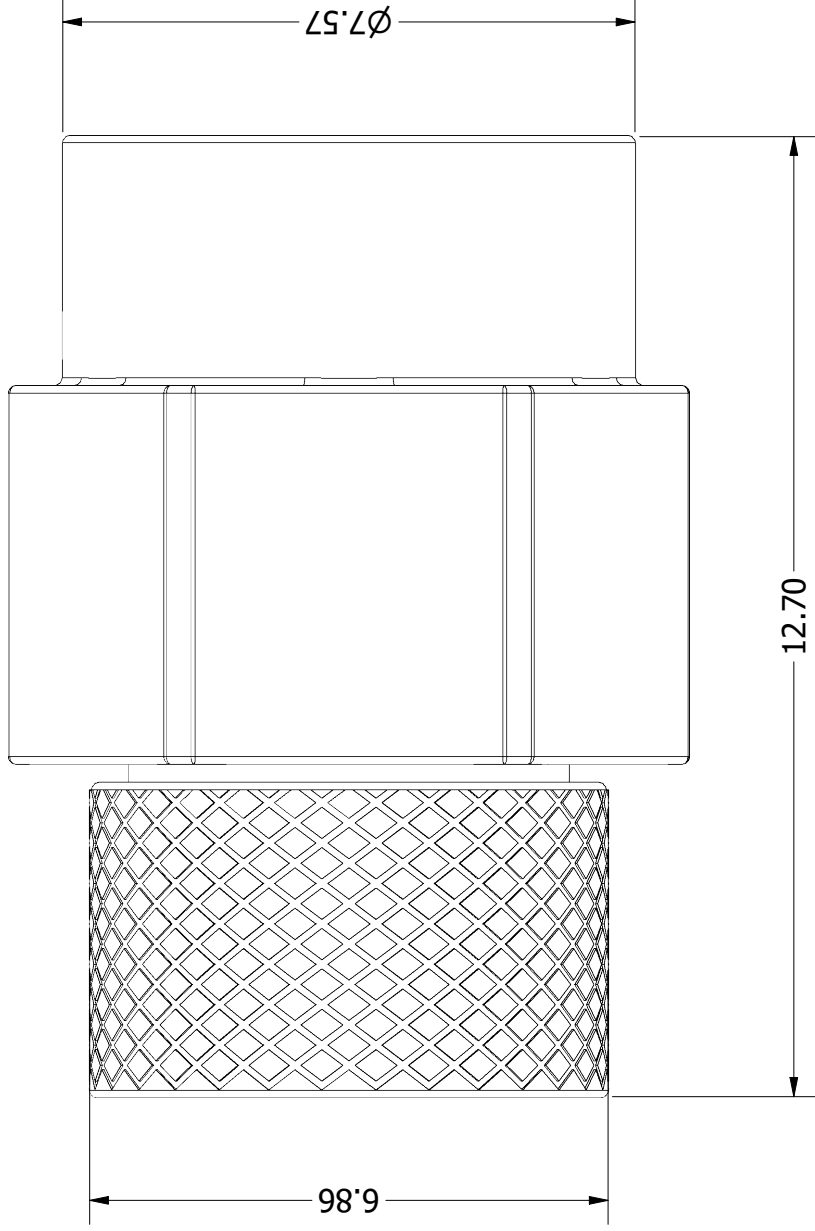

## Title:

RF Coaxial Terminator, 2.92 mm (M) ,  
50 Ohm , 2 Watt

## Notes:

1. All dimensions are in millimetres unless otherwise specified.
2. These characteristics are typical and for reference.

**multiLane**

[www.multilaneinc.com](http://www.multilaneinc.com)  
[sales@multilaneinc.com](mailto:sales@multilaneinc.com)

Rev: A

Scale: 10:1